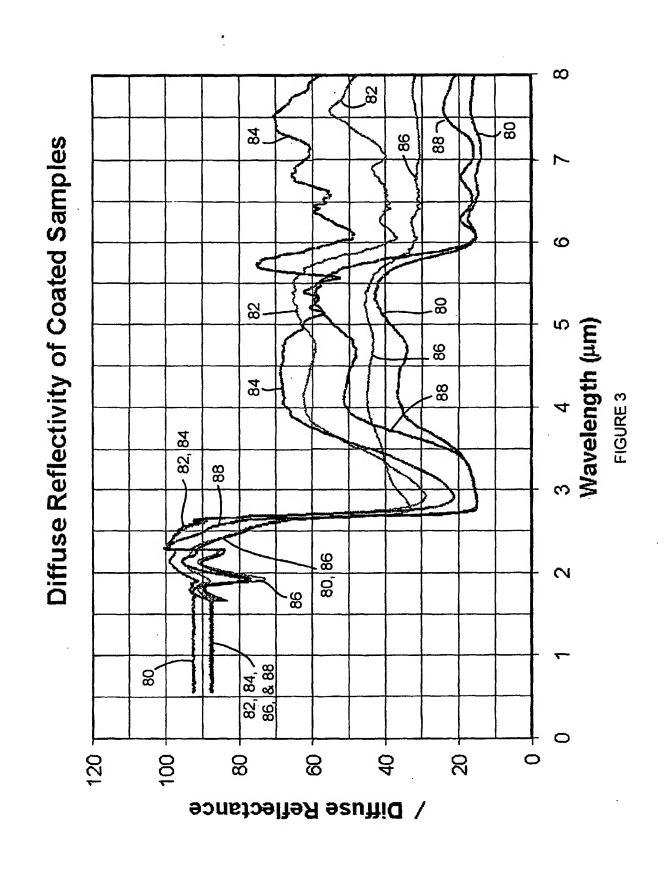
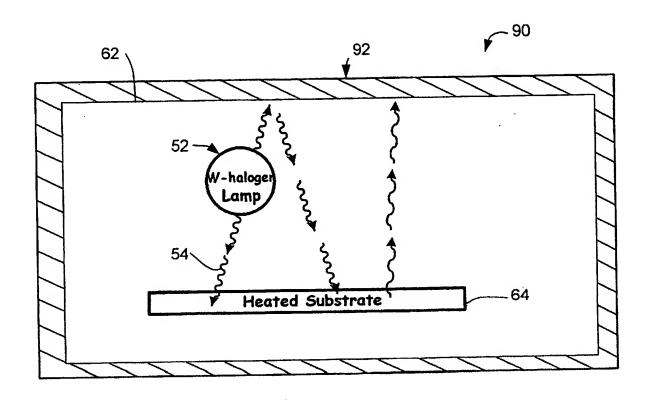


FIGURE 2





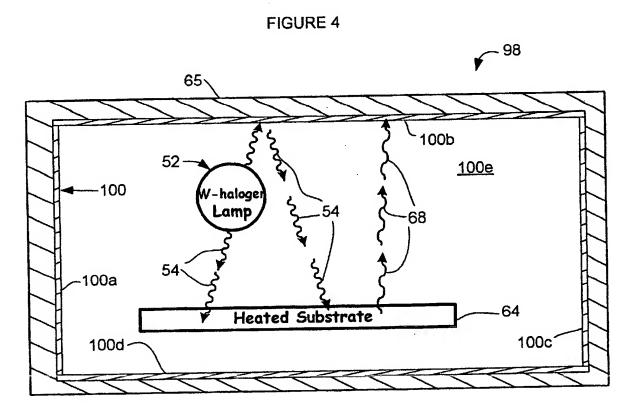


FIGURE 5

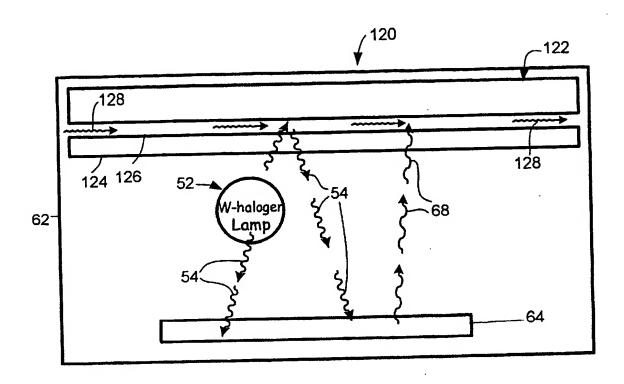


FIGURE 6

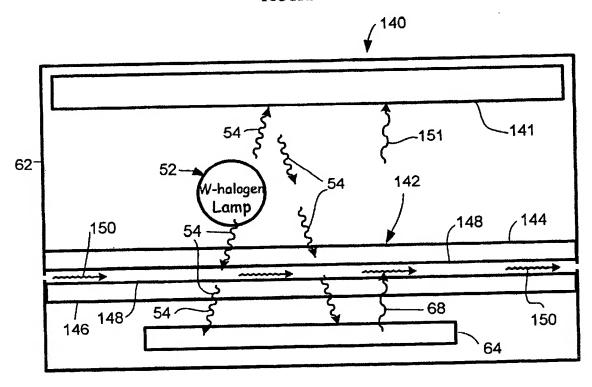
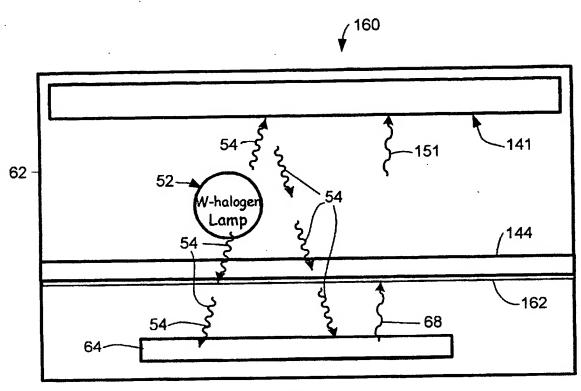


FIGURE 7



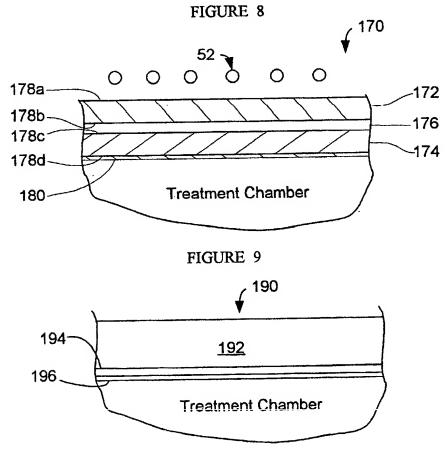
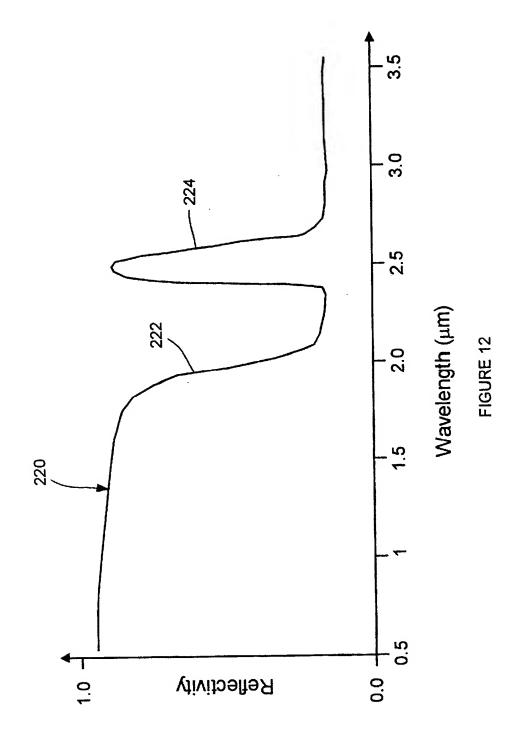


FIGURE 10

USJ "Spike" Anneal Peak-Width Improvement for 300-mm Wafers 200 5. Time (Sec.) 202 $\Delta_{72}^{T_2}$ Temp rature (°C) 950 1100

FIGURE 11



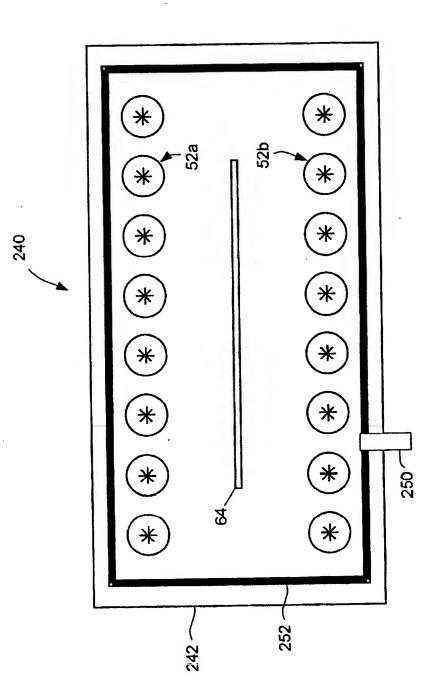
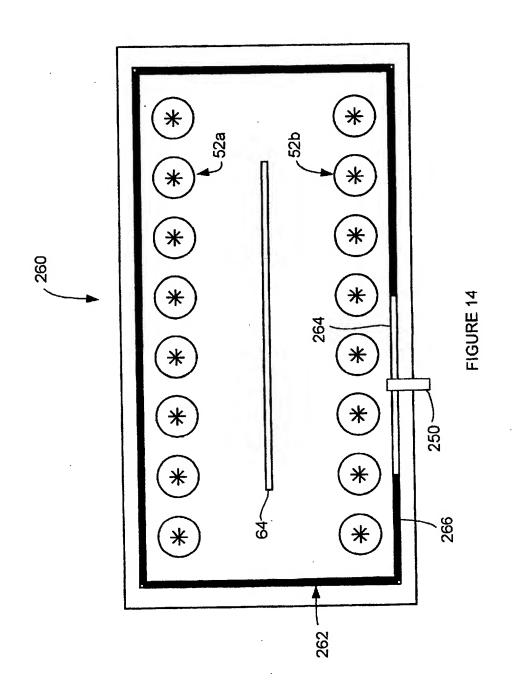


FIGURE 13






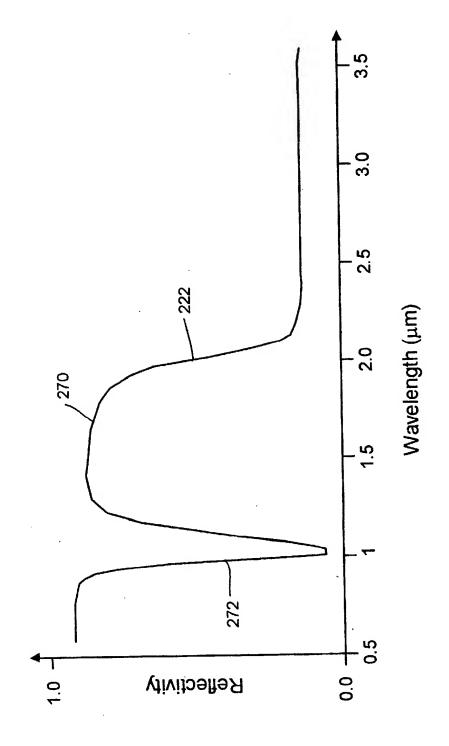


FIGURE 15

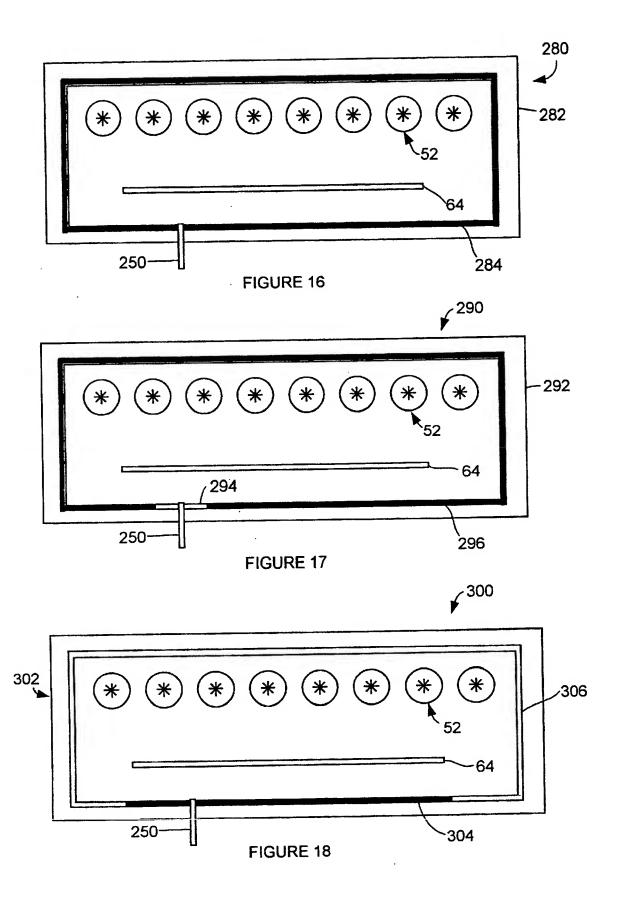

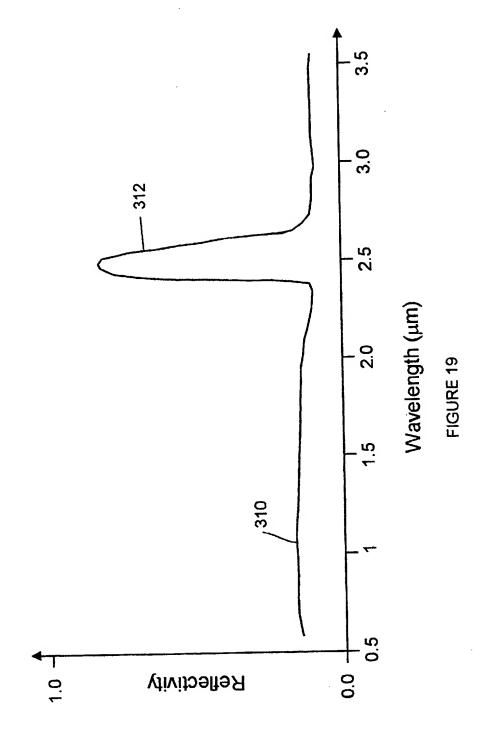

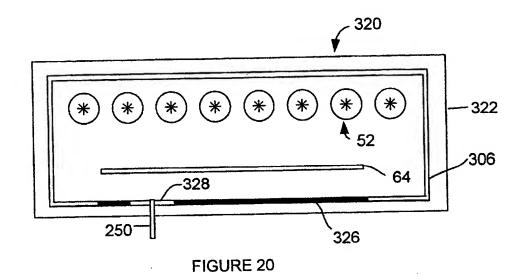

336 334c 250c 338c 250a 338b 338b 338b 338b

FIGURE 21